

Götessons Industri AB
Box 56
523 22 ULRICEHAMN
SWEDEN

Testing of seating furniture according to FprEN 16139:2024

(3 appendices)

Customer:	Götessons Industri AB
Test object/ID:	Modular seating/647604 – Sandy solus
Test method:	FprEN 16139:2024 Furniture - Strength, durability and safety - Requirements for non-domestic seating. Test level 1
Scope:	Complete test
Date of test:	2025-03-18 – 2025-04-10
Test result:	The tested object passed the test
Reservation:	The test results in this report apply solely to the specimen tested
Test environment:	23 ± 2°C and 50 ± 5% relative humidity
Measurement uncertainty:	Decision rule according to EN ISO IEC 17025:2018 clause 3.7 No account is taken of measurement uncertainty when reporting numerical results
Additional information:	The test method and results also comply with EN 16139:2013

RISE Research Institutes of Sweden AB Department Building and Real Estate - Technical Wood Assessment

Performed by

Lukas Andersson

Lukas Andersson

Examined by

Bengt-Åke Andersson

Bengt-Åke Andersson

Appendices

1. Test result (3 pages)
2. Test object (1 page)
3. Pictures (2 pages)

RISE Research Institutes of Sweden AB

Postal address

Box 857
501 15 BORÅS
SWEDEN

Office location

Brinellgatan 4
504 62 Borås
SWEDEN

Phone / Fax / E-mail

+46 10-516 50 00
+46 33-13 55 02
info@ri.seThis report may not be reproduced other than in full, except
with the prior written approval of the issuing laboratory.Accred. No. 1002
Testing
ISO/IEC 17025

Appendix 1

Test result

Abbreviations: N/A = Not applicable
N/T = Not tested

Table 1

1.	Safety	FprEN 16139	Result
1.1	<p><u>General requirements</u></p> <p>The seating shall be so designed as to minimise the risk of injury to the user.</p> <p>All accessible parts shall be so designed that physical injury and damage are avoided.</p> <p>This requirement is met when:</p> <ul style="list-style-type: none"> a) accessible corners are rounded or chamfered; b) the edges of the seat, back rest and arm rests which are in contact with the user when sitting in the chair are rounded or chamfered; c) the edges of handles are rounded or chamfered in the direction of the force applied; d) all other edges are free from burrs and rounded or chamfered; e) the ends of hollow components are closed or capped. <p>Movable and adjustable parts shall be designed so that injuries and inadvertent operation are avoided.</p> <p>It shall not be possible for any load bearing part of the seating to come loose unintentionally.</p> <p>All parts which are lubricated to assist sliding shall be designed to protect users from lubricant stains when in normal use</p>	4.1 4.2	Pass
1.2	<p><u>Shear and squeeze points</u></p> <p>With the exception of tipping seats there shall be no shear and squeeze points created by parts of the seating operated by powered mechanisms, e.g. springs and gas lifts.</p> <p>There shall be no shear and squeeze points created by forces applied during normal use as well as during normal movements and actions</p> <p>Note! Shear and squeeze points that are created only during manually setting up and folding are acceptable, because the user can be assumed to be in control of his/her movements and to be able to cease applying the force immediately upon experiencing pain.</p>	4.3	Pass

Appendix 1

Table 2

2.	Stability	EN 1022:2023	Result
2.1	Forwards overbalancing Requirement $\geq 2 \times 20$ N	7.3.1	Pass > 100 N
2.2	Forwards overturning for seating with footrest Requirement ≥ 20 N	7.3.2	N/A
2.3	Corner stability test Requirement 30 kg	7.3.3	N/A
2.4	Sideways overbalancing, all seating without arms Requirement ≥ 20 N	7.3.4	Pass > 100 N
2.5	Sideways overbalancing, all seating with arms Requirement ≥ 20 N	7.3.5.2	N/A
2.6	Sideways overbalancing, seating with raised side edges	7.3.5.3	N/A
2.7	Rearwards overbalancing, all seating with backs Requirement $\geq 2 \times 166$ N	7.3.6	Pass > 350 N

Table 3

3.	Strength, durability	Reference EN 1728	Cycles	FprEN 16139 level 1	Result
3.1	Seat and back static load test	6.4	10	Seat: 2x1600 N Back: 2x560 N	Pass
3.2	Seat front edge static load test	6.5	10	2x1300 N	Pass
3.3	Vertical static load on back rests	6.6	10	2x600 N Seat: 1300 N	Pass
3.4.1	Foot rest static load test	6.8	10	1300 N Seat: 750 N	N/A
3.4.2	Leg rest static load test	6.9	10	1300 N	N/A
3.5	Arm sideways static load test	6.10	10	400 N	N/A
3.6	Arm downwards static load test	6.11	5	750 N	N/A
3.7	Vertical upwards static load on arm rests for stackable seating	6.13.2	10	25 kg	N/A

Appendix 1

3.	Strength, durability	Reference EN 1728	Cycles	FprEN 16139 level 1	Result
3.8	Seat and back durability test	6.17	100 000	Seat: 2x1000N Back: 2x300 N	Pass
3.9	Seat front edge durability test	6.18	50 000	800 N	Pass
3.10	Seat side-to-side durability test (For single column seat)	Annex B	10 000	1100 N	N/A
3.11	Arm durability test	6.20	30 000	400 N	N/A
3.12	Foot rest durability test	6.21	50 000	1000 N Seat: 1000 N	N/A
3.13	Leg rest durability test	Annex C	10 000	1000 N	N/A
3.14	Leg forward static load test	6.15	10	500 N Seat: 1000 N	N/A
3.15	Leg sideways static load test	6.16	10	400 N Seat: 1000 N	N/A
3.16	Seat impact test	6.24	10 x 2	240 mm	Pass
3.17	Backward fall test	6.28	5	Unloaded	N/A
3.18	Back impact test	6.25	10 x 2	210 mm/38°	Pass
3.19	Arm impact test	6.26	10	210 mm/38°	N/A
3.20	Auxiliary writing surface static load test	6.14	10	300 N	N/A
3.21	Auxiliary writing surface durability test	6.22	10 000	150 N	N/A

Appendix 2

Test object

Test object/ID: Modular seating/647604 – Sandy solus

Dimensions¹

Width: 1715 mm

Depth: 1360 mm

Height: 820 mm

Seat height: 460 mm

Mass: 74.4 kg

Components

Frame/legs: Laminated particleboard

Seat: Flexible foam and fabric

Backrest: Flexible foam and fabric

Functions: Magnetic connections

Sampling: The test object was selected by the customer

Date of arrival at
RISE test laboratory: 2025-03-06

Observed defects before testing: No defects

¹ The dimensions are only intended to unambiguously identify the test object and do not claim to be metrologically accurate

Appendix 3

Pictures



Figure 1



Figure 2

Appendix 3

Pictures



Figure 3

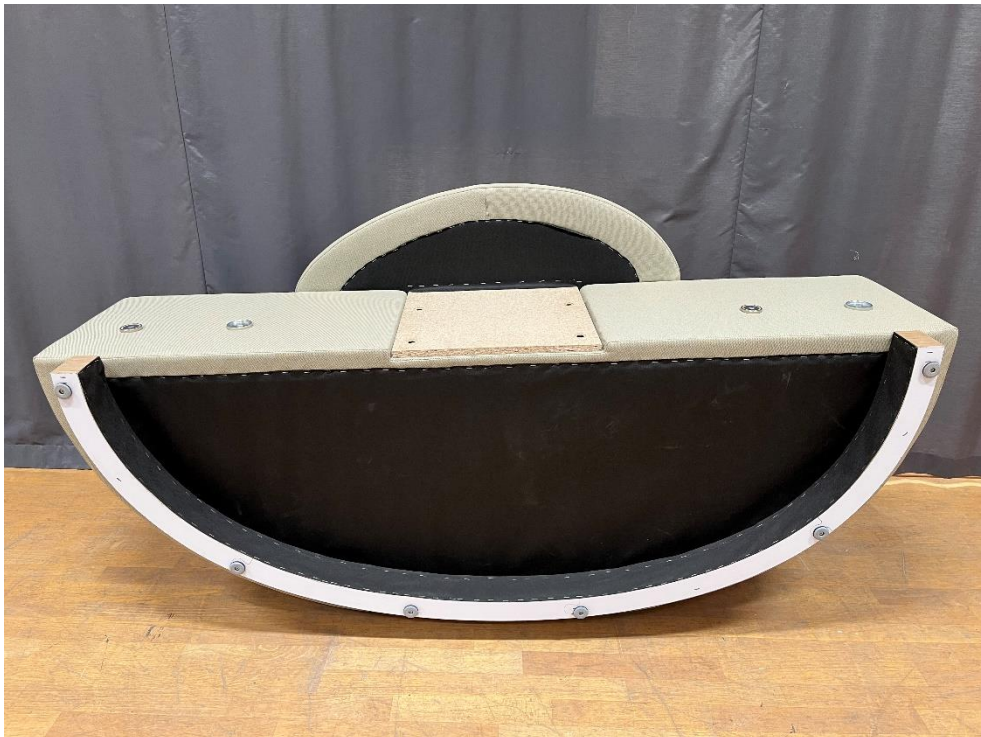


Figure 4

Verification

Transaction 09222115557544296830

Document

1310644A Götessons Sandy Solus report

Main document

7 pages

Initiated on 2025-04-15 10:50:47 CEST (+0200) by Bengt-Åke Andersson (BA)

Finalised on 2025-04-15 10:51:58 CEST (+0200)

Signatories

Bengt-Åke Andersson (BA)

RISE Research Institutes of Sweden AB

Company reg. no. 556464-6874

bengt-ake.andersson@ri.se



Signed 2025-04-15 10:51:17 CEST (+0200)

Lukas Andersson (LA)

Research Institutes of Sweden AB

Company reg. no. 556464-6874

lukas.andersson@ri.se



Signed 2025-04-15 10:51:58 CEST (+0200)

This verification was issued by Scrive. Information in italics has been safely verified by Scrive. For more information/evidence about this document see the concealed attachments. Use a PDF-reader such as Adobe Reader that can show concealed attachments to view the attachments. Please observe that if the document is printed, the integrity of such printed copy cannot be verified as per the below and that a basic print-out lacks the contents of the concealed attachments. The digital signature (electronic seal) ensures that the integrity of this document, including the concealed attachments, can be proven mathematically and independently of Scrive. For your convenience Scrive also provides a service that enables you to automatically verify the document's integrity at: <https://scrive.com/verify>

